

Firmware Release Notes

NTC-140-02 – 4G M2M Router



Copyright

Copyright© 2020 NetComm Wireless Limited. All rights reserved.

NetComm Wireless Limited was acquired by Casa Systems, Inc. a Delaware company on 1 July 2019. The information contained herein is proprietary to Casa Systems, Inc. No part of this document may be translated, transcribed, reproduced, in any form, or by any means without prior written consent of Casa Systems, Inc.

Trademarks and registered trademarks are the property of NetComm Wireless Limited or their respective owners. Specifications are subject to change without notice. Images shown may vary slightly from the actual product.



Note – This document is subject to change without notice.

Document history

This document covers the following product:

NetComm NTC-140-02 – 4G M2M Router

VER.	DOCUMENT DESCRIPTION	DATE
v1.0	Initial document release	5 June 2014
v1.1	Updated for firmware version 2.0.31.3	20 July 2016
v1.2	Updated for firmware version 2.0.60.5	25 September 2018
v1.3	Updated with an additional fix in 2.0.60.5	3 October 2018
v1.4	Updated for firmware version 2.0.60.6	4 February 2020

Table i. - Document revision history

Contents

Firmware details	4
Version history	4
v2.0.60.6.....	4
Enhancements	4
v2.0.60.5.....	4
Enhancements	4
v2.0.31.3.....	5
Changes/New features.....	5
Enhancements	5
v2.0.31.2.....	5
Changes/New features.....	5
Enhancements	5
v2.0.31.1 (Initial release).....	5
Upgrading the router firmware	6
Upgrading the module firmware	8
Firmware approval	10

Firmware details

ITEM	DESCRIPTION
Model	NTC-140-02
Product Name	4G M2M Router
Date	4 February 2020
Router Firmware Version	v2.0.60.6
Module Firmware Version	v05.05.58.00
File Name	ntc_140_2.0.60.6.cdi
File Size	56.8MB
MD5 Checksum	399300c56f5f733ea30ba5fb28ec522a

Version history

v2.0.60.6

Enhancements

-  Optimised the flash memory writing strategy to improve the product's operational life span (TT 38878)

v2.0.60.5

Enhancements

-  Improved security of the device (TT 24700)
-  Corrections to Data stream endpoint descriptions in User Guide (TT 24755)
-  Updated embedded User Guide (TT 24773)
-  Fixed an issue with the Google maps GUI (TT 24599)
-  Fixed an issue with Pull up voltage setting not persisting after reboot if it was set to 8.2V (TT 24152)

v2.0.31.3

Changes/New features

-  None.

Enhancements

-  Updated toolchain to gcc 4.9.3 and glibc 2.23.
-  Fixed an issue where a PPPoE connection could not be established when “Forward WAN IP” is enabled.
-  Fixed an issue where the PPTP verbose button did not work under certain scenarios.
-  Updated iptables to remove WiFi Hotspot and Isolation rules.
-  Fixed a PPTP connection status issue on the web user interface where the status is not updated if the router is rebooted.
-  Fixed a cosmetic issue with the firmware upgrade log display.

v2.0.31.2

Changes/New features

-  None.

Enhancements

-  Network connection enhancements
-  Cosmetic enhancements

v2.0.31.1 (Initial release)

Upgrading the router firmware


The firmware update process must be completed in the order described below. Please follow the instructions carefully.




Note – In order to perform a firmware update, you must be logged into the router with the root manager account. Refer to the “Advanced configuration” section of the *User Guide* for details.

To update the NTC-140-02 router’s firmware:

- 1 Connect one end of the RJ45 (Ethernet cable) to the LAN port of the NTC-140-02 router and the other end to the Ethernet port of your computer.
- 2 Connect your power source (not included in the package) to the Molex connector of the NTC-140-02 router and plug it into an available wall socket. Wait approximately 1 minute for the router to start up.
- 3 Extract the firmware image (.cdi) from the zip archive to a location on your computer.
- 4 Open a web browser and navigate to <http://192.168.1.1> or <http://my.router/>
- 5 In the Username field, enter **root** and in the Password field, enter **admin** then click the **Log in** button.

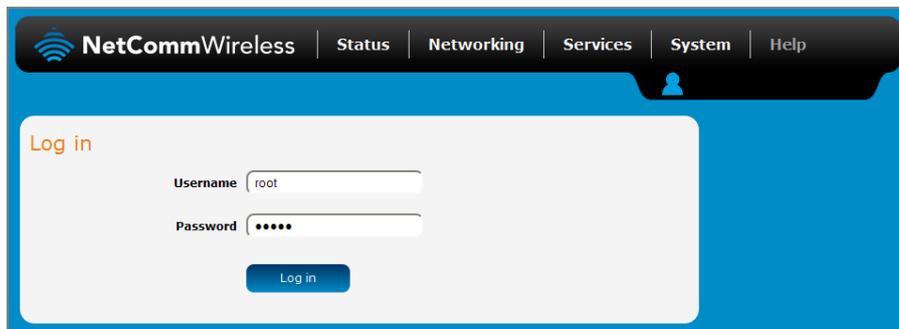

- 6 Select the **System** item from the top menu bar, select the **System configuration** item from the menu on the left and then select the **Upload** menu item.
- 7 Under the **File uploads** section, click the **Choose a file** button. Locate the firmware file on your computer (for example, ntc_140_2.0.60.5.cdi) and click **Open**.
- 8 Click the **Upload** button. The firmware file is uploaded to the router.

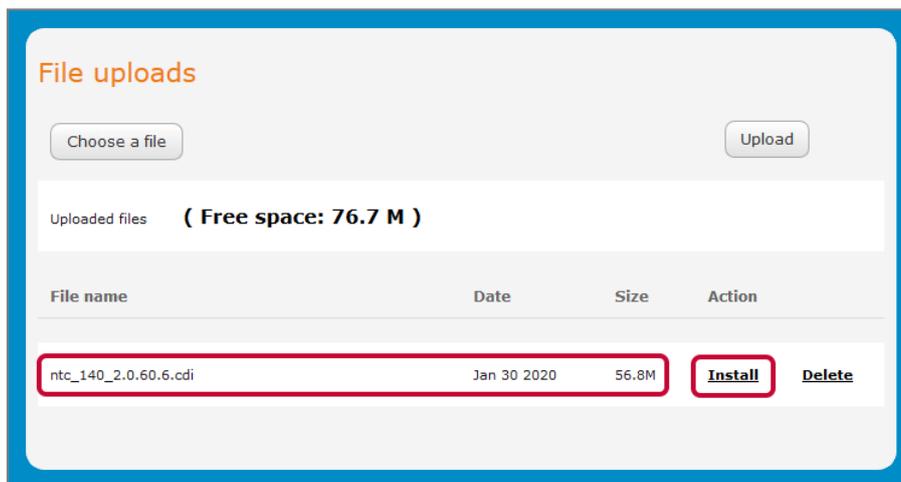

- 9 Next to the firmware file (for example, **ntc_140_2.0.60.6.cdi**), click the **Install** link and then click **OK** on the confirmation pop-up window.

- 10 The recovery image is updated and when it is complete the router displays **“The firmware update was successful”** and then returns to the list of uploaded files.



Note – Do not remove the power when the router’s LEDs are flashing as this is when the firmware update is in process.

```

Writing data to block 20 at offset 0x280000
Writing data to block 21 at offset 0x2a0000
Writing data to block 22 at offset 0x2c0000
Done
Done
Skipping install scripts, nothing to do
Skipping post-install, nothing to do
Done
The firmware update was successful Reboot to main system...
Estimated time remaining: 49 seconds
Estimated time remaining: 44 seconds
Estimated time remaining: 39 seconds
Estimated time remaining: 34 seconds
Estimated time remaining: 29 seconds
Estimated time remaining: 24 seconds
Estimated time remaining: 19 seconds
Estimated time remaining: 14 seconds
Estimated time remaining: 9 seconds
Estimated time remaining: 4 seconds
Redirecting you to the Status page
    
```

[Close](#)

- 11 Log in to the router once more and navigate to the **Status** page.

System information

System up time	Device version	Cellular module
 01:32:58	<p>Hardware version 1.3</p> <p>Serial number 173911192900768</p> <p>Firmware version V2.0.60.6</p>	<p>Model MC7304</p> <p>Module firmware 05.05.58.00</p> <p>IMEI 354143066116443</p>

- 12 Confirm that the **Firmware version** field shows the updated firmware version number.
The firmware upgrade is complete.

Upgrading the module firmware


We recommend using the latest module firmware version. You can determine the module firmware by examining the **Module firmware** field on the router's status page. If the module firmware version does not match the one provided in the latest firmware package, follow the instructions below to upgrade the module firmware.



Important – Do not rename these files as this will cause the upgrade to fail.
– Before upgrading the module firmware, ensure that you have upgraded the router firmware to the latest version.

To upgrade the module firmware:

- 1 Log in to the router by performing steps 1-6 from the [Upgrading the router firmware](#) section of this guide.
- 2 Under the **File uploads** section, click the **Choose a file** button. Locate the module firmware file (.cwe extension) on your computer and click **Open**.
- 3 Click the **Upload** button. The file is uploaded to the router.
- 4 Repeat steps 2 and 3 for the .nvu file.

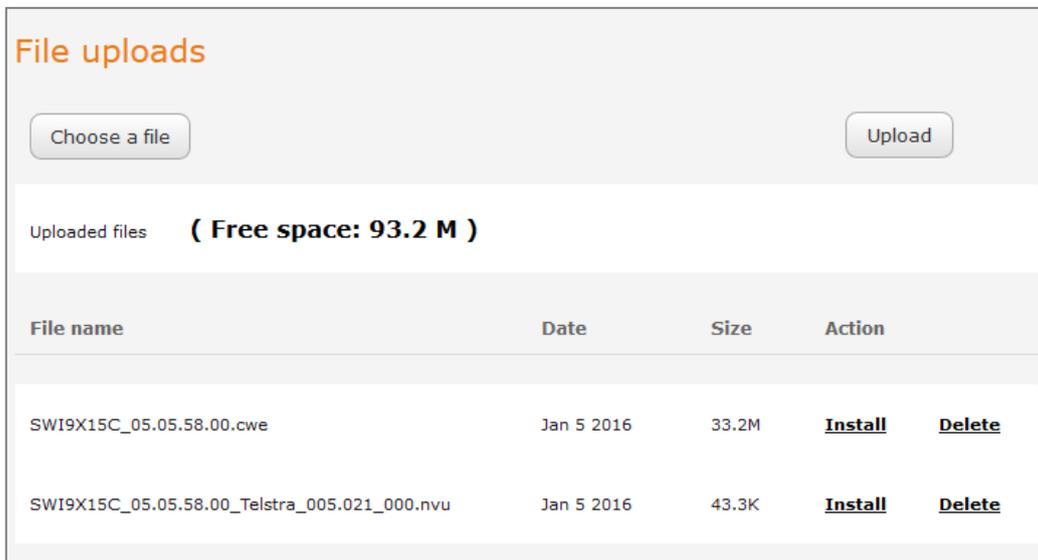

The screenshot shows the 'File uploads' section of a router's web interface. At the top, there are two buttons: 'Choose a file' and 'Upload'. Below these buttons, it indicates 'Uploaded files (Free space: 93.2 M)'. A table lists the uploaded files with columns for File name, Date, Size, and Action.

File name	Date	Size	Action
SWI9X15C_05.05.58.00.cwe	Jan 5 2016	33.2M	Install Delete
SWI9X15C_05.05.58.00_Telstra_005.021_000.nvu	Jan 5 2016	43.3K	Install Delete

- 5 Next to the .cwe file, click the [Install](#) link and then click **OK** on the confirmation pop-up window.
- 6 The module firmware is updated and when it is complete the router displays **"The installation was successful"** and then returns to the list of uploaded files.



Note – It is not necessary to click the [Install](#) link for the .nvu file. The .nvu file is used as part of the .cwe installation.

```

.....
Firmware Download Completed
Device Ready
INFO: Firmware Upgrade successful!!!
10. remove upgrade directory
11. terminate slqssdk
INFO: Device Type( 0,1,2->9x00,9x15,G3K ): 1
Downloading Firmware.....
.....
Firmware Download Completed
Device Ready
INFO: Firmware Upgrade successful!!!
10. remove upgrade directory
11. terminate slqssdk
12. switch to operation mode
13. restore WIFI
14. enable supervisor (system watchdogs)
Done.
The installation was successful

```

[Close](#)

7 Click the **Status** menu to return to the **Status** page.

System information

System up time	Device version	Cellular module
 00:27:08	Hardware version 1.3 Serial number 173999153200010 Firmware version V2.0.31.2	Model MC7304 <div style="border: 2px solid red; padding: 2px;"> Module firmware 05.05.58.00 </div> IMEI 354143069900090

8 Under the **System information** section, confirm that the **Module firmware** version displays the correct version of the module firmware.

The module firmware upgrade is complete.

Firmware approval

DATE	FIRMWARE VERSION	NAME	POSITION	SIGNATURE